


Technische fiche :

ME 315 C



Technical characteristics			Metrisch
1.1	Manufacturer		Manitou
1.2	Model Name		ME 315c
1.3	Power source		Electric
1.4	Operator type		Seated
1.5	Max. capacity	Q	1500 kg
1.6	Load centre of gravity	c	500 mm
1.8	Load distance, centre of drive axle to fork	x	365 mm
1.9	Wheelbase	y	1220 mm
Weight			
2.1	Service weight		3000 kg
2.2	Weight on front axle (laden) / rear axle (laden)		3930 kg / 570 kg
2.3	Weight on front axle (Unladen) / rear axle (Unladen)		1370 kg / 1630 kg
Wheels			
3.1	Tyres type		Super Elastic
3.2	Dimensions of front wheels		18x7-8
3.3	Dimensions of rear wheels		200/50-10
3.5	Number of front wheels / rear wheels		2 / 1
3.5.2	Number of drive wheels		1
3.6	Front wheel gauge	b10	835 mm
Dimensions			
4.1	Tilt of Mast Forward (deg) / Backward (deg)	α / β	5 / 6
4.7	Height of overhead guard (cabin)	h6	2105 mm
4.8	Seat height/stand height	h7	1020 mm
4.12	Height of towing bar (coupling height)	h10	500 mm
4.19	Overall length	l1	3015 mm
4.20	Length to face of forks	l2	1865 mm
4.21	Overall width	b1	990 mm
4.22	Forks section / width / length	s / e / l	35 mm x 100 mm / 1150 mm
4.23	Fork carriage ISO 2328 (class/form) A/B		FEM 2A
4.24	Fork carriage width	b3	1000 mm
4.31	Ground clearance below mast	m1	100 mm
4.32	Ground clearance at centre of wheelbase	m2	100 mm
4.33	Aisle Width for pallets 1000 x 1200 crossways	Ast	3201 mm
4.34	Aisle width for 800 x 1200 pallet lengthways	Ast	3325 mm
4.35	Turning radius	Wa	1510 mm
Performances			
5.1	Travel speed (laden / unladen)		9.50 km/h / 10.50 km/h
5.2	Lifting speed (laden / unladen)		0.22 m/s / 0.34 m/s
5.3	Lowering speed (laden / unladen)		0.58 m/s / 0.48 m/s
5.5	Drawbar pull (Laden / Unladen)		500 daN / 530 daN
5.7	Gradeability (laden / unladen)		7 % / 9 %
5.10	Service brake		Hydraulic
Engine			
6.1	Drive motor rating S2 60 min		4 kW
6.3	Battery according to DIN 43531/35/36 A, B, C		DIN43535 A
6.4	Battery / Batteries capacity		24 V / 840 Ah
6.6	Energy consumption		3.50 kW/h
7.2	Engine power according to ISO 1585		8.60 kW
Miscellaneous			
8.1	Type of drive control		Electric
8.2	Working hydraulic pressure for attachments		145 Bar
8.3	Oil flow rate for attachments		16 l/min
8.4	Measured/guaranteed mean noise level at the ear of the operator		< 70 dB
8.4	Sound level at the driver's ear according to DIN 12 053		40 dB

ME 315 C - Tekening met afmetingen

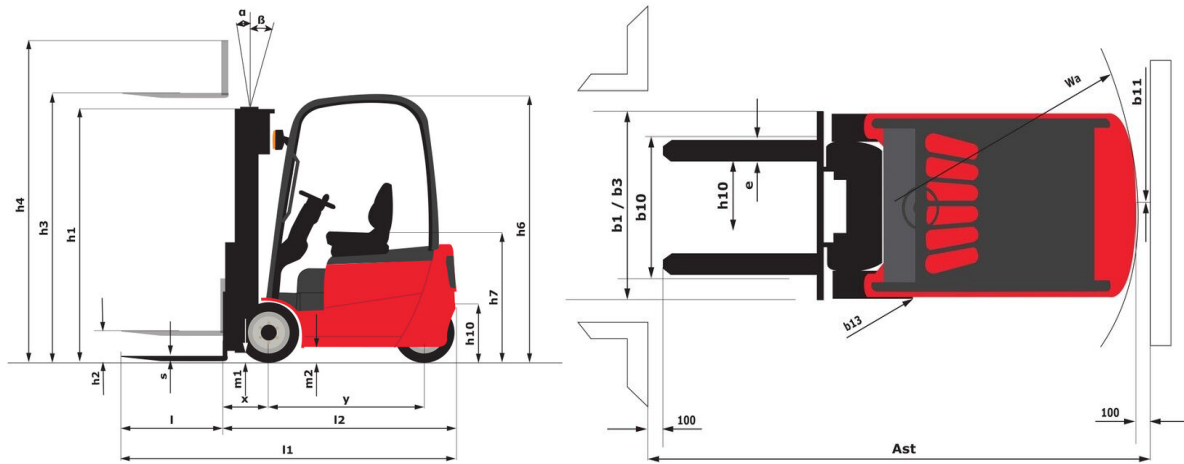

Kenmerken van de masten en restcapaciteiten

Full Visibility Duplex		FVD 27	FVD 30	FVD 33	FVD 36	FVD 40	FVD 43	FVD 45
h2 - Free lift	mm	155	155	155	155	155	155	155
h1 - Height mast lowered *	mm	1830	1980	2130	2330	2580	2730	2830
h3 - Lifting Height	mm	2700	3000	3300	3600	4000	4300	4500
h4 - Height mast extended *	mm	3233	3533	3833	4133	4533	4833	5033
h4 - Height mast extended with load backrest	mm	3655	3955	4255	4555	4955	5255	5455
α / β - Mast inclination (front / rear)	°	6 / 5	6 / 5	6 / 5	6 / 5	3.50 / 5	3.50 / 5	3.50 / 5
Residual capacity at max height	kg	1500	1500	1500	1500	1500	1500	1450
Residual capacity without attachment (Industrial load chart)	kg	1500	1500	1500	1500	1500	1500	1450
Residual capacity with integrated side shift (Industrial load chart)	kg	1500	1500	1500	1500	1500	1500	1450
Residual capacity with hooked-on side shift (Industrial load chart)	kg	1500	1500	1500	1500	1450	1400	1350
Height at max capacity	mm	2700	3000	3300	3600	4000	4300	4000
Height at max capacity with integrated sideshift	mm	2700	3000	3300	3600	4000	4300	4000

Free Lift Duplex		FLD 27	FLD 30	FLD 33	FLD 36	FLD 40
h2 - Free lift	mm	1286	1436	1586	1736	1986
h1 - Height mast lowered *	mm	1845	1995	2145	2295	2545
h3 - Lifting Height	mm	2700	3000	3300	3600	4000
h4 - Height mast extended *	mm	3259	3559	3859	4159	4559
h4 - Height mast extended with load backrest	mm	3645	3945	4245	4545	4945
α / β - Mast inclination (front / rear)	°	6 / 5	6 / 5	6 / 5	6 / 6	3.50 / 5
Residual capacity at max height	kg	1500	1500	1500	1500	1500
Residual capacity without attachment (Industrial load chart)	kg	1500	1500	1500	1500	1500
Residual capacity with integrated side shift (Industrial load chart)	kg	1500	1500	1500	1500	1500
Residual capacity with hooked-on side shift (Industrial load chart)	kg	1500	1500	1500	1500	1450
Height at max capacity	mm	2700	3000	3300	3600	4000
Height at max capacity with integrated sideshift	mm	2700	3000	3300	3600	4000
Height at max capacity with hooked-on sideshift	mm	2700				

Free Lift Triplex		FLT 40	FLT 43	FLT 45	FLT 48	FLT 50	FLT 55	FLT 60	FLT 65
h2 - Free lift	mm	1371	1471	1521	1671	1771	1971	2200	2400
h1 - Height mast lowered *	mm	1945	2045	2095	2245	2345	2545	2795	2995
h3 - Lifting Height	mm	4000	4300	4500	4800	5000	5500	6000	6500
h4 - Height mast extended *	mm	4584	4884	5084	5384	5584	6084	6605	7105
h4 - Height mast extended with load backrest	mm	4955	5255	5455	5755	5955	6455	6955	7455
α / β - Mast inclination (front / rear)	°	3.50 / 5	3.50 / 5	3.50 / 5	3.50 / 5	3.50 / 5	3.50 / 5	3.50 / 5	3.50 / 5
Residual capacity at max height	kg	1450	1400	1350	1300	1250	1200	1000	600
Residual capacity without attachment (Industrial load chart)	kg	1450	1400	1350	1300	1250	1200	1000	600
Residual capacity with integrated side shift (Industrial load chart)	kg	1450	1400	1350	1300	1250	1200	1000	600
Residual capacity with hooked-on side shift (Industrial load chart)	kg	1350	1300	1250	1200	1150	1100	900	500

Free Lift Triplex		FLT 40	FLT 43	FLT 45	FLT 48	FLT 50	FLT 55	FLT 60	FLT 65
Height at max capacity	mm	4000							
Height at max capacity with integrated sideshift	mm	4000							



 **MANITOU**
HANDLING YOUR WORLD

Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



Deze publicatie geeft een beschrijving van de versies en configuratiemogelijkheden van de Manitou-producten, waarvan de uitrusting kan verschillen. De afgebeelde uitrustingen in deze brochure kunnen standaard, optioneel of niet leverbaar zijn, afhankelijk van de versies. Manitou behoudt zich het recht voor om op te allen tijde en zonder voorafgaande kennisgeving de vermelde specificaties te wijzigen. De weergegeven specificaties zijn niet bindend voor de fabrikant. Voor meer bijzonderheden kunt u uw Manitou dealer raadplegen. Dit document is niet contractueel. De presentatie van de producten is niet contractueel. Specificatielijst is niet uitputtend. De logo's, evenals de visuele identiteit van de onderneming zijn eigendom van Manitou en mogen niet zonder toestemming worden gebruikt. Alle rechten voorbehouden. De foto's en schema's in deze brochure zijn bedoeld als informatie en zijn indicatief.

MANITOU BF NV - Naamloze vennootschap met raad van bestuur - Kapitaal: 39 668 399 euro - 857 802 508 RCS Nantes