

Technische fiche :

MLA 3-35 H






Capacities		Metrisch
Static tipping load with bucket (straight)		1670 kg
Static tipping load with bucket (full tum)		1280 kg
Static tipping load with forks (straight)		1169 kg
Static tipping load with forks (full tum)		909 kg
Max. height of bucket pivot point	h35	2.86 m
Max. lifting height (below forks)	h3	2.65 m
Breakout force with bucket		2540 daN
Weight and dimensions		
Unladen weight (with forks) with 2-post canopy		2472 kg
Unladen weight (with forks) with 4-post canopy		2520 kg
Unladen weight (with forks)		2649 kg
Overall length to carriage (with hitch)	l11	3.35 m
Overall length to carriage (without hitch)	l3	3.35 m
Wheelbase	y	1.63 mm
Overall width of 2 posts canopy	b21	1.01 m
Overall width of 4 posts canopy	b22	1.02 m
Overall cab width	b4	1.02 m
Overall width (over tyres)	b1	1.32 m
Overall height with FOPS removed and ROPS folded	h36	1.78 m
Overall height with 2 posts canopy	h37	2.48 m
Overall height with 4 posts canopy	h38	2.26 m
Overall height with cab	h17	2.26 m
Tilt-up angle	a4	39.70 °
Tilt-down angle	a5	43 °
External turning radius (over tyres)	Wa1	2.63 m
Articulation angle		45 °
Standard tyres		Mitas - 31x15 5 15 SK 02
Ground clearance	m4	0.24 m
Engine		
Engine brand		Yanmar
Environmental norm		Stage 3A
Engine model		3TNV88
Number of cylinders / Capacity of cylinders		3 - 1600 cm ³
I.C. Engine power rating / Power (kW)		35 Hp / 26 kW
Max. torque / Engine rotation		102.70 Nm / 1680 rpm
Engine cooling system		2 radiators water + hydraulic oil
Transmission		
Transmission type		Hydrostatic
Number of gears (forward / reverse)		2 / 2
Max. travel speed (may vary according to applicable regulations)		19 km/h
Differential lock		Limited slip differential on front & rear axles
Parking brake		Manual
Hydraulics		
Hydraulic pump type		Gear pump
Hydraulic flow - Pressure		45 l/min / 207 Bar
Drive hydraulic system pressure		345 Bar
Tank capacities		
Hydraulic oil		26 l
Fuel tank		57 l
Noise and vibration		
Vibration to whole hand/arm		< 2.50 m/s ²
Miscellaneous		
Safety cab homologation		ROPS - FOPS cab (level 1)

Opties / afwerkingen

S: Serie / O: Optie/ - : Niet beschikbaar

	Essential	Classic
Lifting function		
Easy Connect System (E.C.S.)	S	S
Hydraulic attachment locking	O	O
Operator station		
Adjustable and telescopic steering column	S	S
Canopy	S	-
Closed cab with heating	-	S
Floor mat	-	S
Tuner car radio (50 W)	-	S
Motorization/Power		
Attachment hydraulic line	S	S
Continuous flow hydraulics	S	S
Hand throttle	S	S
Self cleaning air prefilter	S	S
Lighting		
Complete road lighting	O	S
Front and rear work lights on cab (x4: 2 front + 2 rear)	S	S

MLA 3-35 H - Tekening met afmetingen

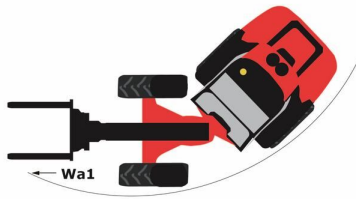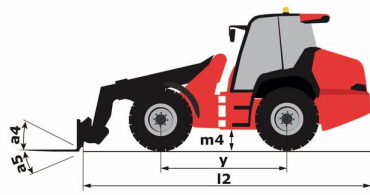



 **MANITOU**
HANDLING YOUR WORLD

Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

www.manitou.com



Deze publicatie geeft een beschrijving van de versies en configuratiemogelijkheden van de Manitou-producten, waarvan de uitrusting kan verschillen. De afgebeelde uitrustingen in deze brochure kunnen standaard, optioneel of niet leverbaar zijn, afhankelijk van de versies. Manitou behoudt zich het recht voor om op te allen tijde en zonder voorafgaande kennisgeving de vermelde specificaties te wijzigen. De weergegeven specificaties zijn niet bindend voor de fabrikant. Voor meer bijzonderheden kunt u uw Manitou dealer raadplegen. Dit document is niet contractueel. De presentatie van de producten is niet contractueel. Specificatielijst is niet uitputtend. De logo's, evenals de visuele identiteit van de onderneming zijn eigendom van Manitou en mogen niet zonder toestemming worden gebruikt. Alle rechten voorbehouden. De foto's en schema's in deze brochure zijn bedoeld als informatie en zijn indicatief.

MANITOU BF NV - Naamloze vennootschap met raad van bestuur - Kapitaal: 39 668 399 euro - 857 802 508 RCS Nantes