

Technische fiche :



# **EP 15 EASY**

---



Technical characteristics		Metrisch	
1.1	Manufacturer		Manitou
1.2	Model Name		EP 15 EASY
1.3	Power source		Battery
1.4	Operator type		Pedestrian
1.5	Max. capacity	Q	1500 kg
1.6	Load centre of gravity	c	600 mm
1.8	Load distance, centre of drive axle to fork	x	960 mm
1.9	Wheelbase	y	1285 mm
Weight			
2.1	Service weight		220 kg
Wheels			
3.1	Tyres type		Bandage
3.2	Dimensions of front wheels		210 x 70
3.3	Dimensions of rear wheels		80 x 64
3.4	Additional wheels (dimensions)		70 x 40
3.5	Number of front wheels / rear wheels		3 / 4
3.5.2	Number of drive wheels		1
3.6	Front wheel gauge	b10	404 mm
3.7	Rear wheel gauge	b11	400 mm
Dimensions			
4.4	Lift	h3	120 mm
4.9	Height tiller min.	h14	720 mm
4.9	Height tiller max.	h14	1220 mm
4.15	Fork height in low position	h13	80 mm
4.19	Overall length	l1	1669 mm
4.20	Length to face of forks	l2	520 mm
4.21	Overall width - Single wheels	b1	568 mm
4.22	Forks section / width / length	s / e / l	50 mm x 160 mm / 1150 mm
4.25	Fork spread	b5	560 mm
4.32	Ground clearance at centre of wheelbase	m2	30 mm
4.34	Aisle width for 800 x 1200 pallet lengthways	Ast	2100 mm
4.35	Turning radius	Wa	1400 mm
Performances			
5.1	Travel speed (laden / unladen)		4.50 km/h / 5 km/h
5.7	Gradeability (laden / unladen)		6 % / 15 %
5.10	Service brake		Electro magnetic
5.11	Parking brake		Handle Release
Engine			
6.1	Drive motor rating S2 60 min		0.65 kW
6.2	Lift motor rating at S3 15%		0.80 kW
6.3	Battery according to DIN 43531/35/36 A, B, C		Semi-Traction
6.4	Battery / Batteries capacity		12 V / 70 Ah
6.5	Battery weight (+/- 5%)		50 kg
Miscellaneous			
8.1	Type of drive control		AC
8.4	Measured/guaranteed mean noise level at the ear of the operator		< 70 dB

# EP 15 EASY - Tekening met afmetingen

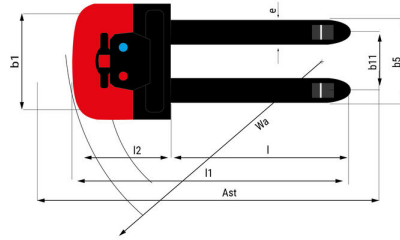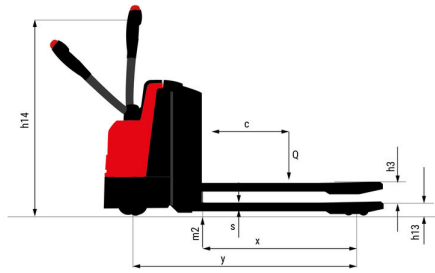



 **MANITOU**  
**HANDLING YOUR WORLD**

Siège Social

430 rue de l'Aubinière - 44150 Ancenis Cedex - France

Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97

[www.manitou.com](http://www.manitou.com)



Deze publicatie geeft een beschrijving van de versies en configuratiemogelijkheden van de Manitou-producten, waarvan de uitrusting kan verschillen. De afgebeelde uitrustingen in deze brochure kunnen standaard, optioneel of niet leverbaar zijn, afhankelijk van de versies. Manitou behoudt zich het recht voor om op te allen tijde en zonder voorafgaande kennisgeving de vermelde specificaties te wijzigen. De weergegeven specificaties zijn niet bindend voor de fabrikant. Voor meer bijzonderheden kunt u uw Manitou dealer raadplegen. Dit document is niet contractueel. De presentatie van de producten is niet contractueel. Specificatielijst is niet uitputtend. De logo's, evenals de visuele identiteit van de onderneming zijn eigendom van Manitou en mogen niet zonder toestemming worden gebruikt. Alle rechten voorbehouden. De foto's en schema's in deze brochure zijn bedoeld als informatie en zijn indicatief.

MANITOU BF NV - Naamloze vennootschap met raad van bestuur - Kapitaal: 39 668 399 euro - 857 802 508 RCS Nantes